

TECHNICAL DATASHEET

Stainless Steel Encoder AC 61 - Profinet



AC61 Profinet

- Interface PROFINET - Encoder Profil PNO 3.162 Version 4.1 and 4.2
- Resolution up to 34 Bit (22 Bit Singleturn + 12 Bit Multiturn)
- Updating of values 125 µs / Cycle time 31.25 µs
- Diagnostic LEDs
- Device data: position, speed, acceleration, diagnostic data, alarms
- Device configuration: resolution, total measuring range, preset, offset, direction, scaling, residual value (round axis) function, speed limits, acceleration limits
- Wide temperature range of -40°C ... +85°C
- "Best in Class" shock and vibration specs
- High corrosion resistance: high grade stainless steel housing
- High energy efficiency
- Protection class IP 67

ACURO[®]
industry

PROFI[®]
NET

CE

UL[®]
LISTED

RoHS

TECHNICAL DATA mechanical

Housing diameter	61.5 mm
Shaft diameter	9.52 mm (3/8 inch) / 10 mm (Solid shafts)
Mounting Flange	Square flange 63.5 mm
Protection class shaft input (EN 60529)	IP67
Protection class housing (EN 60529)	IP67
Shaft load axial / radial	40 N / 80 N
Max. speed	max. 10,000 U/min (continuous duty) max. 12,000 U/min (short term) (higher values available upon request)
Starting torque typ. ¹	≤ 0.05 Nm
Moment of inertia	ca. 3.8 x 10 ⁻⁶ kgm ²
Vibration resistance (DIN EN 60068-2-6)	300 m/s ² (10 - 2000 Hz)
Shock resistance (DIN EN 60068-2-27)	4000 m/s ² (6 ms)
Operating temperature	-40 °C ... +85 °C
Storage temperature	-40 °C ... +85 °C
Material shaft	Stainless Steel
Material housing	Stainless steel
Weight	approx. 1180 g
Connection	Bus cover with 3x M12 connectors

¹ at 20 °C

Specifications subject to change without notice.

Data sheet	© Hengstler GmbH Umlandstr. 49 D-78554 Aldingen/ Germany ☎ +49 74 24 - 89 0 Fax +49 74 24 - 89 500 E-mail: info@hengstler.com Internet: www.hengstler.com	Page
Version 3 260822TK		1/6

TECHNICAL DATASHEET

Stainless Steel Encoder AC 61 - Profinet

TECHNICAL DATA electrical


General design	As per DIN EN 61010-1, protection class III, contamination level 2, overvoltage class II
Supply voltage	DC 7 - 30 V
Current w/o load (typ.)	24V: 55 mA (ST) max; 65 mA (MT)
Power consumption	< 2 W
Resolution Singleturn	10 - 22 Bit
Resolution Multiturn	12 Bit (total max. resolution 32 bits)
Output code	Binary
Profile/ protocol ¹⁾	Profinet IO
Linearity	±½ LSB up to 14 Bit
Absolute accuracy (typ.)	±35"
Repeatability (typ.)	±10"
Device data	position, speed, acceleration, diagnostic data, alarms
Device configuration	resolution, total measuring range, preset, offset, direction, scaling, residual value function, speed limits, acceleration limits
Updating of values / Cycle time	125 µs / 31.25 µs

¹⁾ Encoder profile 4.1 and 4.2 (according to the specification Encoder Version 4.1 Dec 2008 and Version 4.2 March 2017"

ELECTRICAL CONNECTIONS Bus cover with 3x M12 connectors

Pin	Port 1 (P1)	Supply voltage	Port 2 (P2)
1	TxD+	UB in	TxD+
2	RxD+	N.C.	RxD+
3	TxD-	0 V in	TxD-
4	RxD-	N.C.	RxD-
Shield	Shield ¹	Shield ¹	Shield ¹

¹ shield connected to encoder housing

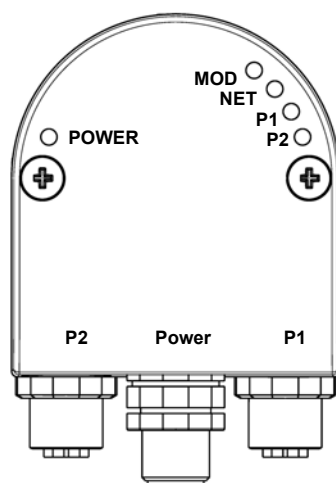


Specifications subject to change without notice.

Data sheet	© Hengstler GmbH Umlandstr. 49 D-78554 Aldingen/ Germany ☎ +49 74 24 - 89 0 Fax +49 74 24 - 89 500 E-mail: info@hengstler.com Internet: www.hengstler.com	Page
Version 3 260822TK		2/6

TECHNICAL DATASHEET

Stainless Steel Encoder AC 61 - Profinet

DIMENSIONAL DRAWINGS

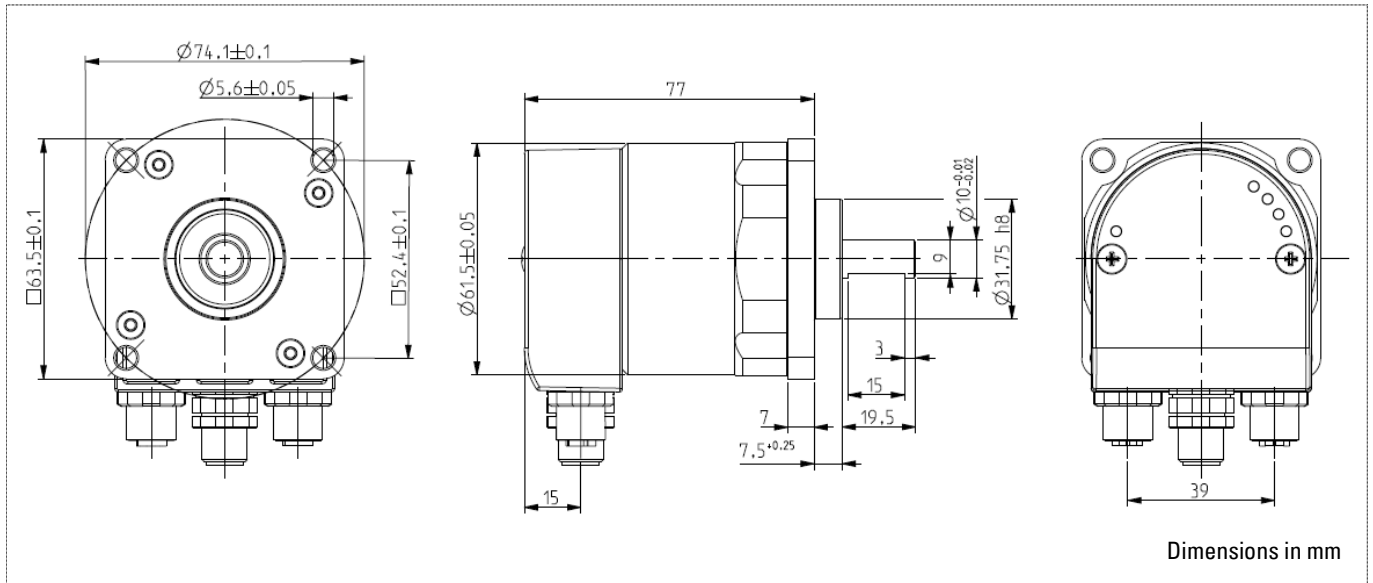

Specifications subject to change without notice.

Data sheet	© Hengstler GmbH Umlandstr. 49 D-78554 Aldingen/ Germany ☎ +49 74 24 - 89 0 Fax +49 74 24 - 89 500 E-mail: info@hengstler.com Internet: www.hengstler.com	Page
Version 3 260822TK		3/6

TECHNICAL DATASHEET

Stainless Steel Encoder AC 61 - Profinet

ORDERING INFORMATION Profinet

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Interface	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
AC61	0010 10 Bit ST 0012 12 Bit ST 0013 13 Bit ST 0014 14 Bit ST 0016 16 Bit ST 0017 17 Bit ST 0018 18 Bit ST 0019 19 Bit ST 0020 20 Bit ST 0022 22 Bit ST 1212 12 Bit MT + 12 Bit ST 1213 12 Bit MT + 13 Bit ST 1214 12 Bit MT + 14 Bit ST 1216 12 Bit MT + 16 Bit ST 1217 12 Bit MT + 17 Bit ST 1218 12 Bit MT + 18 Bit ST 1219 12 Bit MT + 19 Bit ST 1220 12 Bit MT + 20 Bit ST 1222 12 Bit MT + 22 Bit ST Others available upon request	E DC 7 - 30 V	Q.72 Square, IP67, 10 mm Q.76 Square, IP67, 9.52 mm	DN Profinet	R Bus cover with 3x M12 connectors

TECHNICAL MANUALS

	Ordering code
Technical manual, English	2 565 737 (or Home page)
Technical manual, German	2 565 736 (or Home page)

SOFTWARE

	Ordering code
GSDML file, download from our Home page	www.hengstler.com

Specifications subject to change without notice.

Data sheet	© Hengstler GmbH Umlandstr. 49 D-78554 Aldingen/ Germany ☎ +49 74 24 - 89 0 Fax +49 74 24 - 89 500 E-mail: info@hengstler.com Internet: www.hengstler.com	Page
Version 3 260822TK		4/6

TECHNICAL DATASHEET

Stainless Steel Encoder AC 61 - Profinet

Accessories

CONNECTING CABLES

Connecting cables with plug, Power	Ordering code
PUR cable, M12 connector, A coded, 4 pole, single ended, 2m	3 561 086
PUR cable, M12 connector, A coded, 4 pole, single ended, 5m	3 561 081
PUR cable, M12 connector, A coded, 4 pole, single ended, 10m	3 561 099
PUR cable, M12 connector, A coded, 4 pole, single ended, 15m	3 561 087
PUR cable, M12 connector, A coded, 4 pole, single ended, 20m	3 561 095
PUR cable, M12 connector, A coded, 4 pole, single ended, 40m	3 561 094
PUR cable, M12 connector, A coded, 4 pole, single ended, 50m	3 561 096


Connecting cables with plug, Encoder - Port (Drive)	Ordering code
PUR cable, RJ45 + M12 connector, D coded, 4 pole, 2m	3 561 082
PUR cable, RJ45 + M12 connector, D coded, 4 pole, 5m	3 561 083
PUR cable, RJ45 + M12 connector, D coded, 4 pole, 10m	3 561 100
PUR cable, RJ45 + M12 connector, D coded, 4 pole, 15m	3 561 088
PUR cable, RJ45 + M12 connector, D coded, 4 pole, 20m	3 561 093
PUR cable, RJ45 + M12 connector, D coded, 4 pole, 40m	3 561 092

Connecting cables with plug, Encoder - Encoder	Ordering code
PUR cable, 2x M12 connector, D coded, 4 pole, 2m	3 561 084
PUR cable, 2x M12 connector, D coded, 4 pole, 5m	3 561 085
PUR cable, 2x M12 connector, D coded, 4 pole, 15m	3 561 089
PUR cable, 2x M12 connector, D coded, 4 pole, 20m	3 561 101
PUR cable, 2x M12 connector, D coded, 4 pole, 40m	3 561 097
PUR cable, 2x M12 connector, D coded, 4 pole, 50m	3 561 098

FLEXIBLE COUPLINGS



Bellows coupling



Helical coupling



Isolated disk coupling

	Hub diameter d1/d2	Ordering code
Bellows coupling	8 mm / 10 mm	3 520 077
Bellows coupling	10 mm / 10 mm	3 520 037
Isolated disk coupling	6 mm / 10 mm	3 520 082
Isolated disk coupling	10 mm / 10 mm	3 520 088
Helical coupling 25/32	6 mm / 9.53 mm	3 520 052
Helical coupling 25/32	6 mm / 10 mm	3 520 066
Helical coupling 25/32	10 mm / 10 mm	3 520 074
Helical coupling 25/32	10 mm / 12 mm	3 520 065


Specifications subject to change without notice.

TECHNICAL DATASHEET

Stainless Steel Encoder AC 61 - Profinet

Accessories

MEASURINGWHEEL

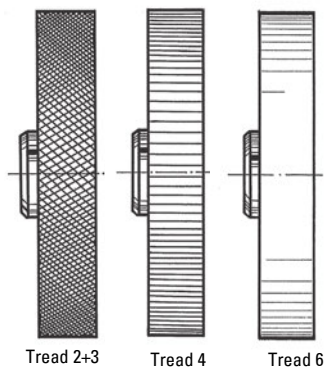

Tread 2 B

with glued - on rubber profile B= low - wear rubber sureface with good (white)
Applications such as paper and cardboard, measuring cables, nongreasy matals, Fleece, undressed or surface - treated wood, soft and hard plastics

Tread 3

vulcanized rubber surface with parallel knurl
Applications such as rubber, leather, fabrics, flooring and glass

Tread 4

Aluminium with parallel knurl
Applications such as rubber, soft plastics, wood with rough surface, and to a limited extent for fabrics

Tread 6

plastic surface
Applications such as wire, greasy metals and steel sections

Material	Bore diameter (mm) fitting to encoder shaft	Circumference	Tread	Width of bearing surface	Ordering code
Aluminium	10 mm	0.2 m	2 B	12 mm	0 601 049
Aluminium	10 mm	0.5 m	2 B	25 mm	0 601 151
Aluminium	10 mm	0.5 m	3	25 mm	0 601 161
Aluminium	10 mm	0.5 m	6	25 mm	0 601 163
Aluminium	10 mm	0.5 yd	4	25 mm	0 601 157

Specifications subject to change without notice.